

LAMBERT

VENTE ET LOCATION D'ÉQUIPEMENT
DE CONSTRUCTION

LGMG

AR65J

ARTICULATING BOOM LIFT

- 
- 573 lbs/772 lbs (260/350kg) dual-capacity design, 8' (2.44m) triple entry platform.
 - Oscillating, full-time floating axels allow the wheels to grip to the ground when driving on hard, uneven terrain.
 - Integrated four-wheel-drive system provides strong power, smooth transmission, and 45% gradeability.
 - Equipped with three steering modes: four-wheel steering, crab steering, and front-wheel steering, and equipped with one-touch wheel alignment.
 - Proportional lift and drive controls deliver smoother maneuvering, precise positioning and comfortable operation.

LGMG Diesel - Articulating Boom Lift

SPECIFICATIONS

MODELS	AR65J (AR20J)	
Measurements	Imperial	Metric
Work Height Max.	70'10"	21.58m
Platform Height Max.	64'3"	19.58m
Horizontal Outreach	40'7"	12.37m
Up and Over Height	26'10"	8.19m
Platform Length	8'	2.44m
Platform Width	2'11"	0.9m
A Stowed Length	30'11"	9.42m
Length-Transport (jib tucked)	25'	7.63m
B Overall Width	8'2"	2.5m
C Stowed Height	8'1"	2.46m
Height-Transport	9'9"	2.96m
D Wheelbase	8'3"	2.51m
E Ground Clearance	1'4"	0.4m

PRODUCTIVITY

Max. Platform Occupancy	2(unrestricted) / 3(restricted)	
Platform Capacity	573/772 lbs	260/350kg
Turntable Rotation	360°	360°
Drive Speed-Stowed	3.1mph	5km/h
Drive Speed-Raised	0.5mph	0.8km/h
Gradeability	45%	45%
Max. Wind Speed	28mph	12.5m/s
Turning Radius-Inside	6'3"	1.9m
Turning Radius-Outside	12'10"	3.9m
Max.Slope	4°/4°	4°/4°
Tires Type	RT Foam-filled	
Tires Size	355/55D625	

POWER

Power Source	Kubota V2403
--------------	--------------

HYDRAULIC SYSTEM

Hydraulic Oil Volume	26.4gal	100L
----------------------	---------	------

WEIGHT




Machine Weight (CE/ANSI)	21715 lbs	9850kg
--------------------------	-----------	--------

STANDARD FEATURES

Proportional control	Emergency stop device
Horn/Hour meter	Auto-leveling platform
Full-height drive	Anti-collision protection
Flashing beacons	Over tilt protection system
Cylinder bellows	Platform control cover
Oscillating axle	Overload sensing system
Platform tool box	Intelligent diagnostic system
Telematics connector	RT Foam-filled tires

OPTIONAL

Telematics	Solid tires
AC power to platform	Solid non-marking tires
Hydraulic generator kit	Foam-filled non-marking tires
Cold weather package	Half-height mesh platform
3.5kw Hydraulic generator	Biodegradable hydraulic oil
Auxiliary rail	

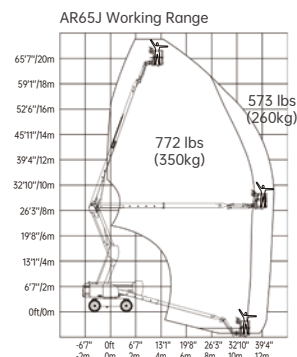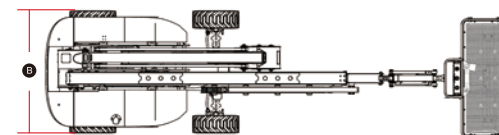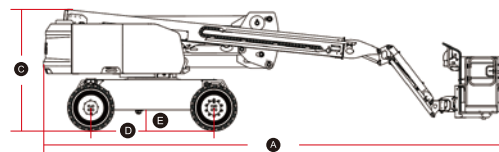

Please contact LGMG or a local dealer for more details.

LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.

This brochure comes into effect in May, 2023.

LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China

Email: sales@lmg.com.cn Tel: +86 531 6787 9283

LGMG Europe B.V.

Address: Donker Duyvisweg 301, 3316 BL Dordrecht, The Netherlands

Email: sales@lmg-europe.com Tel: +31 850 642 777

LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States

Email: sales@lmg-na.com Tel: +1 833 288 5464

www.lmg-lifts.com

LGMG
RELIABILITY IN ACTION